

TECHNICAL INFORMATION

TMC 2000


Air/ Vapor Barrier



DECO PRODUCTS, INC.

Product specification

TMC 2000 is a single component liquid applied air and moisture barrier membrane. TMC 2000 cures to a flexible seamless membrane that provides a continuous air tight building envelope. TMC 2000 permanently bonds to substrates such as wood (i.e.- Plywood, OSB, framing), concrete, concrete block, metal, stucco, rigid insulation and I.C.F.'s.

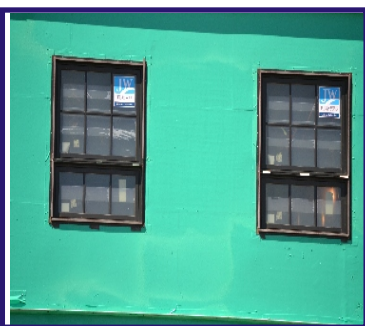

Environmentally Friendly

Totally Water- Based

Non- Hazardous

B E N E F I T S

- Bonds directly to sheathing
- No seams
- Easy to apply
- Non hazardous
- Adhesion strength (ASTM C836)
- Low temperature flexibility (ASTM 836, Sec. 6.7)
- Resistance to decay (ASTM E154)
- Resistance to mold growth (ASTM D3273-94)
- UV fastness (ASTM C836)

Use: For approved applicators

TMC 2000 provides a flexible infiltration barrier against air and moisture. It eliminates the penetrations that building paper and house wrap installation require. TMC 2000 is 100% tight against the surface with NO SEAMS. Therefore it prevents moisture from forming on the sheathing. TMC 2000 forms a seamless coating from the exterior into window and door openings. TMC 2000 is not affected by ultraviolet rays, and contains no aromatic hydrocarbon solvents or aliphatic petroleum naphthas.

Distributed by:



BUILT GREEN™

Made in the U.S.A.

